


	/ 	— F l	NAL DRIVE INTERMEDIATE SHAFT
ITEM	PART NUMBER (QTY.	DESCRIPTION PACKAGE NUMBER
	050275	2	CUP, inner bearing
2	064200	2	CONE ASSEMBLY, inner bearing
3	068501	2	GEAR (44 teeth)
4 5 6	049829 035244 049936	4 4 4	LOCK, gear retaining CAPSCREW, 3/8"NC x 3/4" LOCK, capscrew
7	051246	2	SHAFT
8	049886	2	P <mark>INIO</mark> N (20 teeth)
9	051438	2	CONE ASSEMBLY, outer bearing
10	051347	2	CUP, outer bearing
	051450	4	SHIM, bearing adjustment (.005" thick. Use as req!d)
11	051448	4	SHIM, bearing adjustment (.007" thick. Use as req'd)
	051449	10	SHIM, bearing adjustment (.010" thick. Use as req'd)
1 2 1 3		2 12 12	COVER, outer bearing CAPSCREW, 3/8"NC x 1-1/4" LOCKWASHER, 3/8"

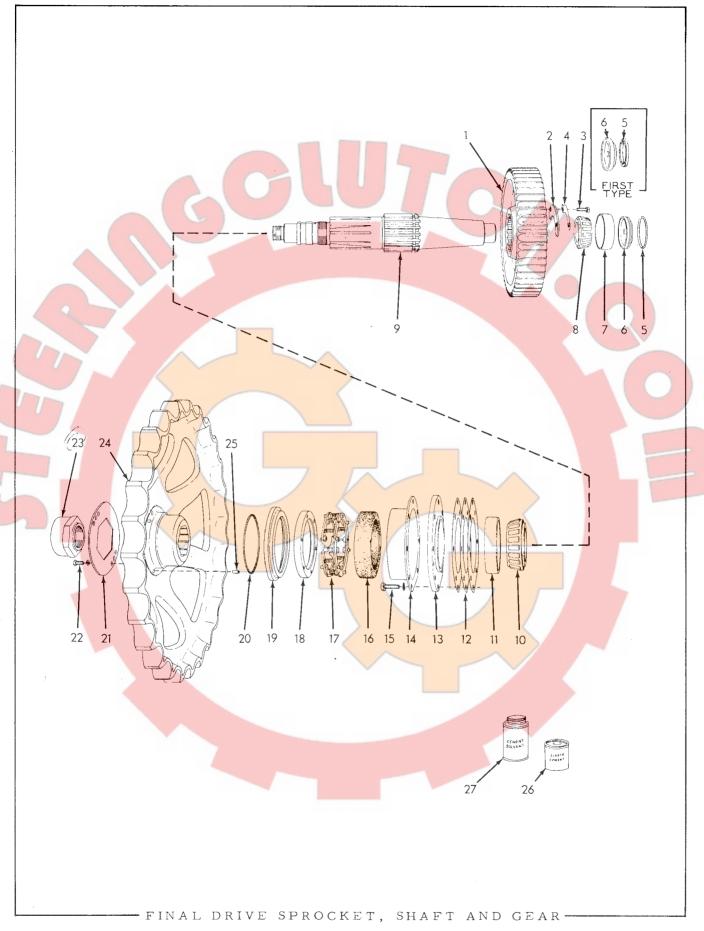

FINAL DRIVE SPROCKET SHAFT AND GEAR

* Used prior to tractor serial No. 8906 ** Effective with tractor serial No. 8906


	PART	ОТ	TY.	** Effective with tractor serial No. 8906	PACKAGE
ITEM	NUMBER	*	**	DESCRIPTION	NUMBER
1	051400	2	2	GEAR (51 teeth)	
2 3 4	051395 036034 051396	2 4 2	2 4 2	LOCK, gear retaining CAPSCREW, 3/8"NF x 1" LOCK, capscrew	
r .	051238	2	-	SEAL, shaft end cover (1/4" thick) (Used prior to tractor #3491)	
5 <	034108	2	2	RING, sealing, shaft end cover (1/8" thick) (Effective with tractor #3491)	
6	049834	2	-	COVER, shaft end, inner (Used prior to tractor #3491)	
	091325	2	2	COVER, shaft end, inner (Effective with tractor #3491)	
7	210740	2	2	GUP, inner bearing	
8	043491	2	2	CONE ASSEMBLY, inner bearing	76-76 9
9	080954	2	2	SHAFT, track sprocket (6 splines) (Original equipment)	
	621238	2	2	SHAFT, track sprocket (20 splines) (Service replacement only)	est de consider
10	050278	2	2	CONE ASSEMBLY, intermediate bearing (3-1/4"I.D.) (Original equipment)	_ }
10	054246	2	2	CONE ASSEMBLY, intermediate bearing (3-3/8"I.D.) (Service replacement only. Used with 20-spline shaft only)	
11	0 50276	2	2	CUP, intermediate bearing	
	051240	4	4	SHIM, bearing adjustment (.005" thick. Use as req'd)	
12 <	051241	4	4	SHIM, bearing adjustment (.007" thick. Use as req'd)	
	051242	16	16	SHIM, bearing adjustment (.010" thick. Use as req'd)	
13	051244	2	2	RETAINER, intermediate bearing	
14 15	049851 035190 904208	2 16 16	2 16 16	GUARD, inner seal CAPSCREW, 1/2"NC x 1-1/2" LOCKWASHER, 1/2"	
16	049826	2	2	BOOT, inner seal	073762 096278
17	049825	2	2	FOLLOWER ASSEMBLY, inner seal (Serviced only as a unit)	073762 096278
18 <	082883	2	-	RING, inner seal (stationary. 5"I.D.)	073762
	096158	-	2	RING, inner seal (stationary, 5-3/16"I.D.)	096278
				(Continued)	


(Revised February 1961)

FINAL DRIVE SPROCKET SHAFT AND GEAR (Continued)

ITEM	PART NUMBER	QTY. * **	DESCRIPTION	PACKAGE NUMBER
	082859	2 -	RING, inner seal (rotating, 6-13/16"O.D.)	. 073762
19 {	096159	- 2	RING, inner seal (rotating, 7-1/2''O.D.)	. 096278
	053594	2 -	RING, packing, seal ring (rubber, 5-5/16"O.D.)	. 073762
20 {	096160	- 2	RING, packing, seal ring (rubber, 5-7/8"O.D.)	. 096278
	049853	2 -	LOCK, sprocket retaining nut (6-3/8"O.D., 3-3/4"hex) (Original equipment)	
21	0961 55	- 2	LOCK, sprocket retaining nut (7-3/4"O.D., 3-3/4" hex) (Original equipment)	
	621243	2 2	LOCK, sprocket retaining nut (4" hex) (Service replacement. Used with 20-spline sprocket only)	
22	035439 904206	4 4 4 4	CAPSCREW, 3/8"NC x 1" LOCKWASHER, 3/8"	
- 33	081369	2 2	NUT, sprocket retaining (Original equipment)	
23 {	621241	2 2	NUT, sprocket retaining (Service replacement. Used with 20-spline sprocket only)	
	049817	2 -	SPROCKET ASSEMBLY, track (Includes item 25) (Standard, Has 5" diam, hub with 6 splines and wide toothbase) (Original equipment)	
5	096146	- 2	SPROCKET ASSEMBLY, track (Includes item 25) (Standard. Has 5-3/16" diam. hub with 6 splines and wide tooth-base) (Original equipment)	
	621237	2 2	SPROCKET ASSEMBLY, track (Includes item 25) (Service replacement. Has 20 splines and wide tooth base)	
24	056188	2 -	SPROCKET ASSEMBLY, track (Includes item 25) (Special. Has 5" diam. hub with 6 splines and narrow tooth-base to minimize packing of track)	4
	096167	- 2	SPROCKET ASSEMBLY, track (Includes item 25) (Special. Has 5-3/16" diam. hub with 6 splines and narrow toothbase to minimize packing of track)	
.5	621225	2 2	SPROCKET ASSEMBLY, track (Includes item 25) (Service replacement. Has 20 splines and narrow tooth-base to minimize packing of track)	
	097960	2 2	SPROCKET RIM, only (Standard type. Requires welding to install)	
25	042930	6 6	PIN, driving, inner seal ring	
26	033288		CEMENT, neoprene, 1/2 pt. can	ing
27	054890		SOLVENT, neoprene, cement, 1/2 pt. can seal boots	

(Added February 1961)

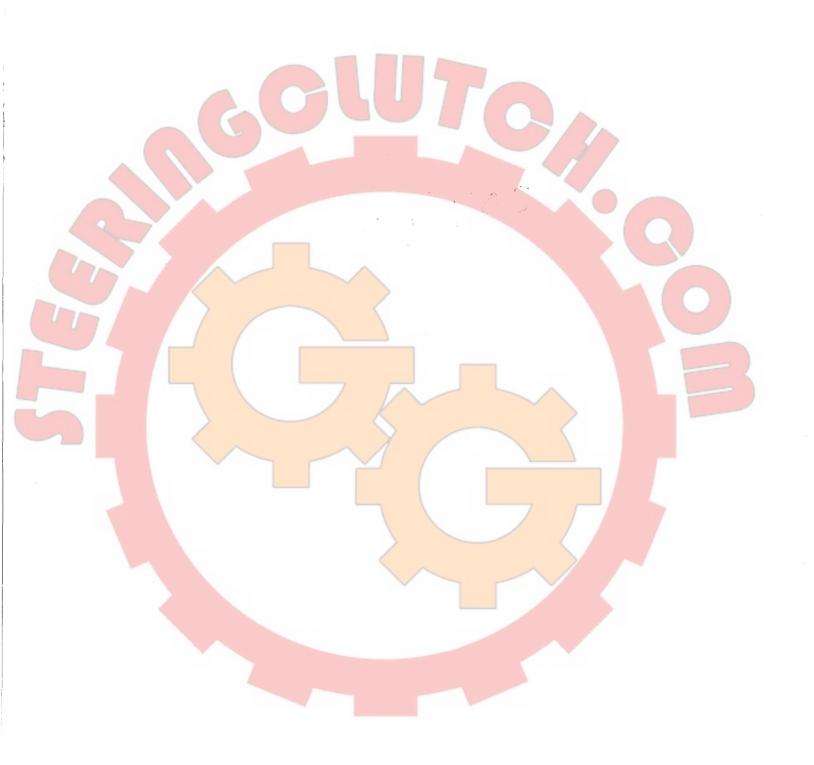

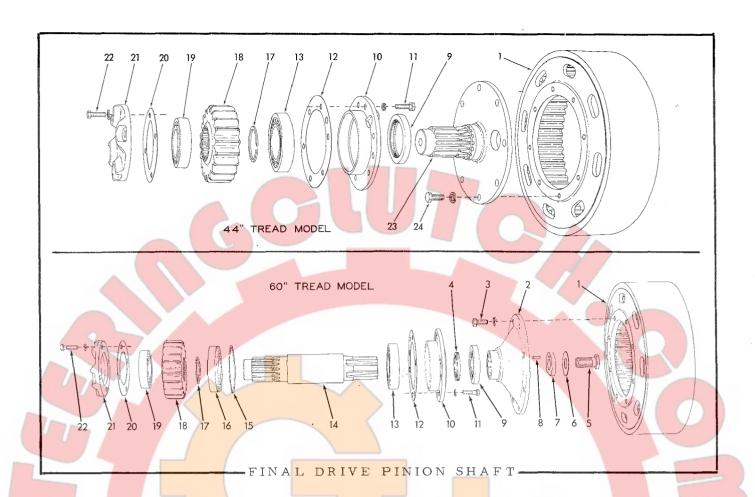


00 40 P 972 Oud

FINAL DRIVE PINION SHAFT

* 44" tread Models ** 60" tread Models

ΙΊ	EM	PART NUMBER	Q7	ΥΥ. **	DESCRIPTION	PACKAGE NUMBER
	1	050216	2	2	DRUM, brake	
	2 3	049937 035221 904208	-	2 16 16	HUB, brake drum CAPSCREW, 1/2"NC x 1" LOCKWASHER, 1/2"	
	4	050264	1	2	SEAL, oil (neoprene)	
	5	050226	-	2	CAPSCREW, hub retaining (1"NF x 1-3/4")	
	6	050225	-	2	WASHER, locking, hub retaining capscrew	
	7	064520	Ŀ	2	WASHER ASSEMBLY, hub retaining (Includes item 8)	
	8	035793	-	2	PIN, hub retaining washer	
7	9	053670	2	2	SEAL, oil	
7	10	049820 922211 904206	2 12 12	2 12 12	CAGE, inner bearing CAPSCREW, Nylok, 3/8"NC x 1-1/4" LOCKWASHER, 3/8"	
	12	051245	2	2	GASKET, inner bearing cage	. 069625
	13	050 <mark>274</mark>	2	2	BEARING, roller, inner	
	14	049945	-	2	SHAFT	
	15	040831	-	2	RING, snap, intermediate bearing	
	16	063912	-	2	BEARING, roller, intermediate	
	17	049899	2	2	RING, snap, pinion shaft	
	18	049881	2	2	PINION (20 teeth)	
	19	050273	2	2	BEARING, rolle <mark>r, oute</mark> r	
	20	049903	2	2	GASKET, outer bearing cover	. 069625
	21 22	049818 013058 904206	2 8 8	2 8 8	COVER, outer bearing CAPSCREW, 3/8"NC x 1-1/4" LOCKWASHER, 3/8"	
	23 24	0498 <mark>22</mark> 207781 904208		=	HUB, brake drum CAPSCREW, 1/2"NC x 1" (thin head) LOCKWASHER, 1/2"	

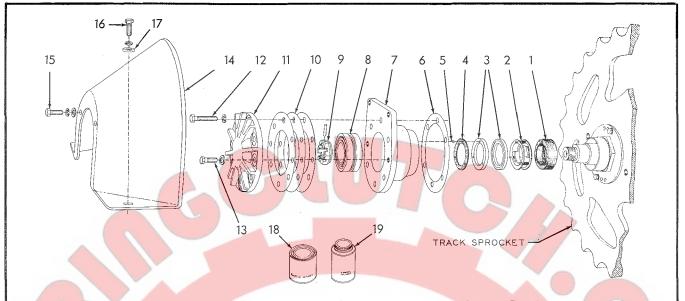

FINAL DRIVE OUTBOARD BEARING AND SEAL

	*	Original	l equipment			
	**	Service	replacement.	Used with	20-spline	track
۱		sprocke	t only			

	PART	0'	ΓY.	sprocket only	PACKAGE
ITEM	NUMBER	*		DESCRIPTION	NUMBER
	049109	2	-	BOOT, seal	073763
1	051112	-	2.	BOOT, seal	088665
2	049111	2	-	SPRING ASSEMBLY, seal (Serviced only as a unit)	073763
	051121	-	2.	SPRING ASSEMBLY, seal (Serviced only as a unit)	
3 {	049110	4	(-,	RING, seal	073763
3	051124	-	4	RING, seal	088665
₁ J	049836	2	-	GASKET, seal ring	073763
4 {	051125	-	2	GASKET, seal ring	088665
5	081194	12	12	STUD, locating, seal ring (Rivets to cage)	
6	085726	12	12	SHIM, outboard bearing cage (.015" thick. Use as req'd)	
7	085834	2	-	CAGE ASSEMBLY, outboard bearing (Includes item 5)	
1	621245	-	2	CAGE ASSEMBLY, outboard bearing (Includes item 5)	
8	080101 > 6293	2 554	2	BEARING, roller (Each consists of 1 roller assembly and cups. Serviced only as a unit)	
9	081242 915513	2 2	2 2	NUT, retaining, outboard bearing PIN, roll, 1/4" x 3/4"	

(Continued)

FINAL DRIVE OUTBOARD BEARING AND SEAL (Continued)

		YT. **	DESCRIPTION	PACKAGE NUMBER
10 { 0	085827 4 085829 4 085828 10	4 4 10	SHIM, bearing adjustment (.005" thick. Use as req'd) SHIM, bearing adjustment (.007" thick. Use as req'd) SHIM, bearing adjustment (.010" thick. Use as req'd)	
12 (13 (085831 2 035068 12 035525 4 904208 16	12	CAPSCREW, $1/2$ "NF x $1-1/8$ "	
15	085832 2 070469 4 900818 4 614478 4	2 4 4	GUARD, track sprocket (Special equipment) CAPSCREW, 1/2"NF x 1-1/4" WASHER, plain, U.S. std., 1/2"	
16	614478 4 904208 8 064531 4	8	CAPSCREW, 1/2"NF x 1-3/8" LOCKWASHER, 1/2" WASHER, plain	
	033288 - 054890 -		CEMENT, neoprene, 1/2 pt. can SOLVENT, neoprene cement, 1/2 pt. can For cementia boots and ga	